


## Few-Mode EDFA

This few mode fiber Erbium doped amplifier has been developed within the EU supported MODE-GAP project. The amplifier covers C-band and is available in 3-mode (LP<sub>01</sub>, LP<sub>11a</sub>, LP<sub>11b</sub>) and 6-mode (LP<sub>01</sub>, LP<sub>11a</sub>, LP<sub>11b</sub>, LP<sub>21a</sub>, LP<sub>21b</sub>, LP<sub>02</sub>) options. Low noise figure and high gain is achievable across the full set of modes. The differential modal gain is low and flat across the wavelength range.

Optical Parameters	Typical
Wavelength Range	1535 – 1560nm (C-band)
Input Power Range	-10 to 0 dBm per mode
Number of spatial modes	3 or 6
Small Signal Gain	> 20dB
Maximum Output Power	17dBm
Differential Modal Gain	< 4dB
Noise Figure	< 6dB
Input/ Output Connector	Bare fiber or FC/PC or FC/APC
<b>General</b>	
Control Electronics Dimensions	19" Rack Unit
Operating Voltage	110-230 VAC
Line Frequency	50 to 60 Hz

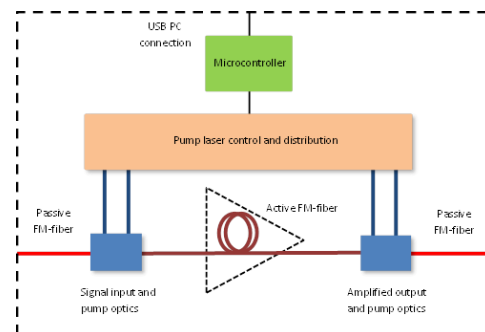

**Technical references:**

1. Y. Jung et al., "Reconfigurable modal gain control of a few-mode EDFA supporting 6 spatial modes," *IEEE Photon. Tech. Lett.* 26, 1100-1103 (2014).
2. Y. Jung et al., "Three mode Er<sup>3+</sup> ring-doped fiber amplifier for mode-division multiplexed transmission," *Opt. Express* 21, 10383-10392 (2013).
3. Y. Jung et al., "First demonstration and detailed characterization of a multimode amplifier for space division multiplexed transmission systems." *Opt. Express* Vol. 19, Issue 26, (2011)

For more information please contact Phoenix sales:  
[sales@phoenixphotonics.com](mailto:sales@phoenixphotonics.com) or visit us at  
[www.phoenixphotonics.com](http://www.phoenixphotonics.com)